




LABCO Ltd

83 Laroche #103, Repentigny, Qc, J6A 7M3 Tel: (450) 581-7589 Fax: (450) 581-8463

*Un autre Produit de
Haute Qualité!
Another High Quality Product!*

CRS24-2AC

*Relais de controle sensible
24VAC 2 amps
Sensitive control relay*

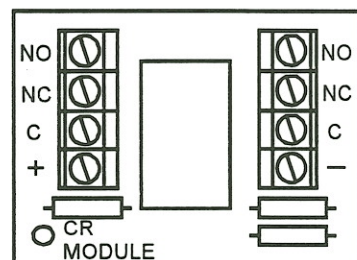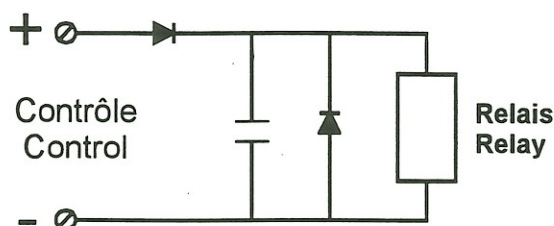

Spécifications

- 2 voltages disponibles:
 - CRS12-2AC : 12VAC, bobine de 960 ohms
 - CRS16-2AC : 16VAC, bobine de 1780 ohms
 - CRS24-2AC : 24VAC, bobine de 2880 ohms
- Montage sur circuit imprimé
- Diode de protection contre les renversements de polarités et le courant inverse du relais
- Contact DPDT
- Courant maximal: 2A CC/CA
- Voltage maximal: 250VCA 220VCC
- Puissance maximale: 60 watts ou 125VA
- Installation facilitée par l'utilisation de ruban adhésif inclus
- Dimensions:

- Hauteur:	0.550"	(14mm)
- Largeur:	1.800"	(45mm)
- Longueur:	1.300"	(33mm)

Specifications

- 3 available voltages:
 - CRS12-2AC : 12VAC, 960 ohms coil
 - CRS16-2AC : 16VAC, 1780 ohms coil
 - CRS24-2AC : 24VAC, 2880 ohms coil
- PCB type
- Polarity diode
- Surge diode
- DPDT contact
- Max. switching current: 2A AC/DC
- Max. switching voltage: 250VAC 220VDC
- Maximum power: 60 watts or 125VA
- Adhesive foam mounting tape
- Dimensions:

- Height:	0.550"	(14mm)
- Width:	1.800"	(45mm)
- Length:	1.300"	(33mm)