

ENFORCER®

Power Distribution Modules

TWO MODELS TO CHOOSE FROM:

PDM-4G5-P1.1 (4 Outputs, 5 Amp 250VAC main fuse)

PDM-9G5-P1.1 (9 Outputs, 5 Amp 250VAC main fuse)


These modules provide four (PDM-4G5-P1.1) or nine (PDM-9G5-P1.1) individually PTC¹-protected outputs.

FEATURES

- Perfect for use in a wide variety of applications, including CCTV, access control, and alarms -- for a wide range of SECO-LARM products.
- Each PTC¹-type output fuse rated 1.1 Amps @ 250VAC.
- Surge-protected outputs.
- Handles up to 28VAC/DC.
- Removable 5-Amp main fuse for easy replacement. Spare fuse included.
- Individual red LEDs for each output.
- Green power LED.
- Power ON/OFF master switch.
- Size: 5³/₁₆" x 3" x 1³/₁₆" (131 x 75 x 21mm)

¹Positive Temperature Coefficient, auto-reset current limiting.

PDM-9G5-P1.1 shown

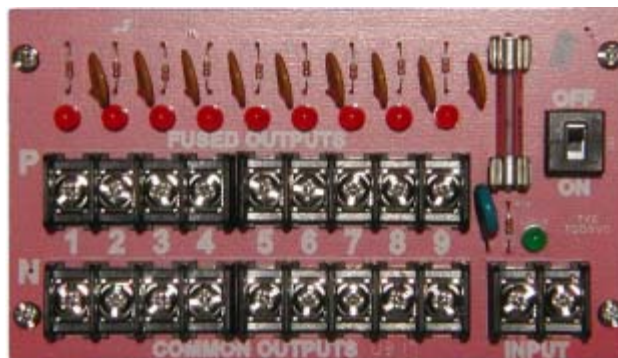

5³/₁₆" x 3" x 1³/₁₆" (131 x 75 x 21mm)

Also available:

AC Power Supplies for CCTV Cameras and Accessories

EVP-124A4-P4 (4 outputs @ 24VAC, 4 Amps)

EVP-124A4-P9 (9 outputs @ 24VAC, 4 Amps)


EVP-124A8-P16 (16 outputs @ 24VAC, 8 Amps)

DC Power Supplies for CCTV Cameras and Accessories


EVP-124D2-P4 (4 Outputs @ 12VDC, 2.5 Amps)

EVP-124D4-P9 (9 Outputs @ 12VDC, 4 Amps)

EVP-124D5-P16 (16 Outputs @ 12VDC, 5 Amps)

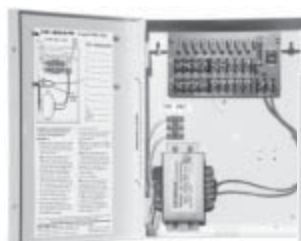

EVP-124A4-P9

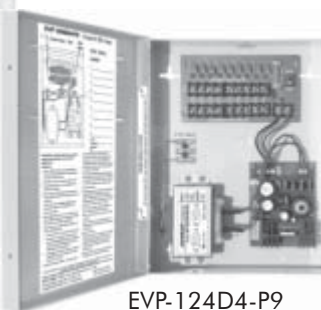

EVP-124D4-P9

The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

For more information, contact

SECO-LARM® U.S.A., Inc.

16842 Millikan Ave.

Irvine, CA 92606

Tel: 1-800-662-0800 (domestic U.S. & Canada)

Tel: 1-949-261-2999 (California & international)

Fax: 1-949-261-7326 Email: info@secolarm.com

Copyright ©2003 SECO-LARM U.S.A., Inc.
PowerDistMods.pmd