

Voice Dialer

E-920B


Automatically dials up to four telephone numbers and delivers up to two different messages when triggered by an alarm system.

Features:

- ▶ Easily connects to an alarm panel and automatically dials out when activated.
- ▶ 2 independent voice messages. Stores up to 4 telephone numbers, cellular numbers, or pager numbers.
- ▶ Delivers a message of up to 16 seconds to each number stored.
- ▶ Instant trigger or exit and entry delay settings.
- ▶ Repeats the voice message for one minute per call.
- ▶ Waits 8 to 10 rings before dialing the next programmed number
- ▶ Calls two times when there is no answer or three times when the line is busy.
- ▶ EEPROM retains memory if power is lost for up to one year.
- ▶ Optional 9-Volt internal battery provides stand-by power for approximately two to three days.
- ▶ Use worldwide because of Universal Dial Tone.
- ▶ Use with PBX or regular telephone systems.
- ▶ 2 NO/NC trigger inputs.

Controls:

- | | |
|-----------------------------|------------------|
| A. DC adapter jack | I. Power switch |
| B. Siren output jack | J. LCD display |
| C. Sensor input connector | K. MODE button |
| D. Telephone line connector | L. MEMORY button |
| E. Speaker | M. VOICE button |
| F. 9VDC battery compartment | N. DIP switches |
| G. Microphone | |
| H. Dial keys | |

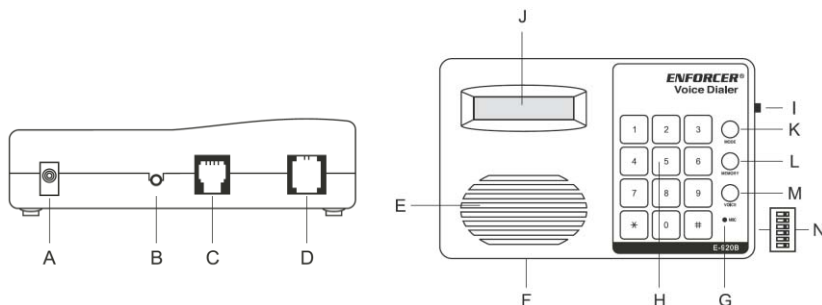

Specifications:

Operating voltage	12VDC
Current Draw	20mA (standby) 60mA (operate) 250mA (siren active)
Trigger Inputs	2 NO/NC
Operating Temperature	-4° ~122°F (-20 ~50°C)
Backup Battery	9VDC (not included)
# of Tel. Numbers	Up to 4
Max. Digits per Tel. #	32
Case Material	ABS plastic
Weight	11-oz (320g)
Dimensions	5 7/8" x 4" x 1 1/2" (148 x 100 x 39 mm)