

LABCO Ltd

79 Laroche, Repentigny, Qc, J6A 7M3 Tel: (450) 581-7589 Fax: (450) 581-8463



Garantie à Vie
Lifetime Warranty



R5-12

Relais de contrôle
12VDC, 5 amps
Control relay

Conforme "ROHS" compliant

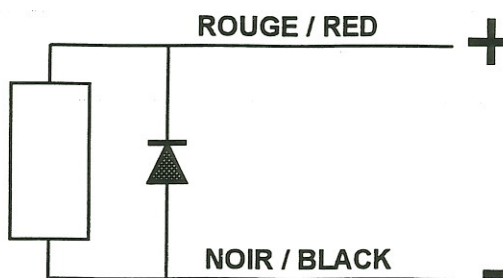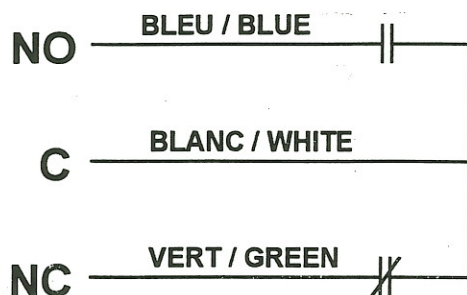

Spécifications

- 2 voltages disponibles:
 - R5-12: 12VCC, bobine de 400 ohms
 - R5-24: 24VCC, bobine de 800 ohms
- Diode de protection contre le courant inverse du Relais
- Contact SPDT
- Contact en argent
- Couvercle à l'épreuve de la poussière
- Courant maximal: 5A à 28VCC, 110VCA
- Puissance maximale: 120 watts ou 600VA
- Courant bobine: 30mA
- Puissance bobine: 360mW approx.
- Isolation: 1000VAC
- Installation facilitée par l'utilisation de ruban Adhésif inclus
- Dimensions:
 - Hauteur: 0.625" (16 mm)
 - Largeur: 0.750" (19 mm)
 - Longueur: 0.750" (19 mm)

Specifications

- 2 available voltages:
 - R5-12: 12VDC, 400 ohm coil
 - R5-24: 24VDC, 800 ohm coil
- Surge diode
- SPDT contact
- Silver contact
- Dust proof relay cover
- Max. Switching current: 5A at 28VDC, 110VAC
- Maximum power: 120 watts or 600VA
- Coil current: 30mA
- Coil power: 360mW approx.
- Dielectric strength: 1000VAC
- Adhesive foam mounting tape
- Dimensions:
 - Height: 0.625" (16mm)
 - Width: 0.750" (19mm)
 - Length: 0.750" (19mm)