



Reflective-Beam Sensor

E-931-S45RRQ Reflective-Beam Sensor - Range: 45 ft. (11 m)

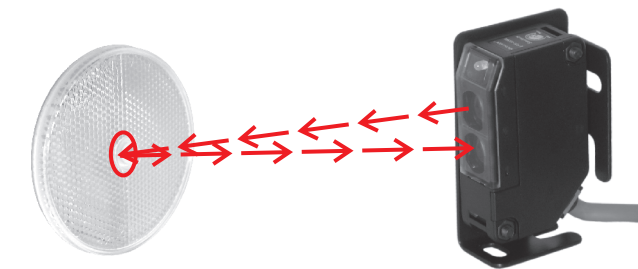


- Typical applications include: sensor for garage doors, outdoor gates or overhead doors; sensor for industrial automation to detect objects on manufacturing line.
- Universal AC/DC power supply.
- Pre-wired 6 ft. cord.
- Weatherproof (IP66) construction for indoor/ outdoor usage.
- Bracket and mounting hardware included for both sensor and reflector.
- Compact size.
- Accessories:
 - E-931ACC-RCQ** – 3" round reflector
 - E-931ACC-RQ** – 2" square reflector
 - E-931ACC-HRQ** – Hood for E-931ACC-RCQ reflector or E-931ACC-RQ reflector

Wiring:

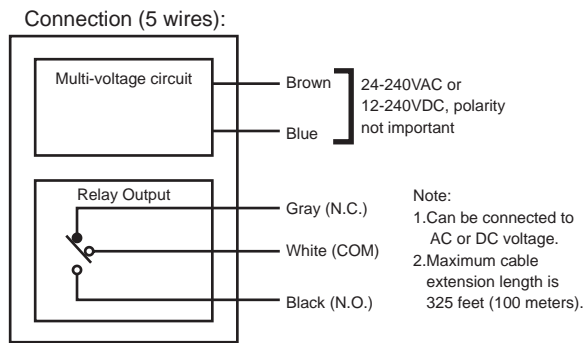

Dimensions:

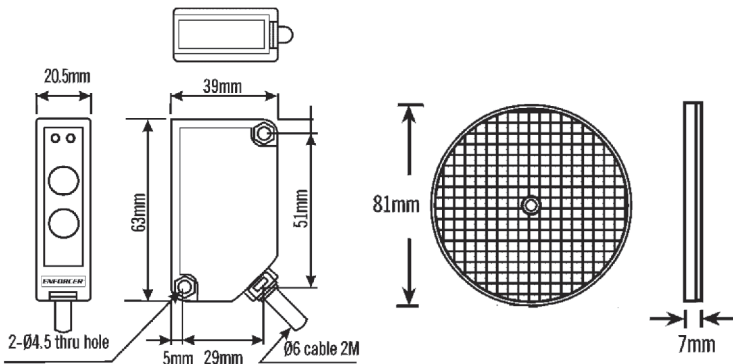

Specifications	E-931-S45RRQ		
Type:	Reflective Beam		
Sensing Range:	0.5' to 45' (0.2 ~ 11 m)		
Supply Voltage:	12 ~ 240 VDC or 24 ~ 240 VAC		
Current Drain		Standby	Active
	12VDC	46mA	65mA
	24VDC	23mA	45mA
Response Time:	5 ~ 10 ms (Variable)		
Light Source:	IR LED		
LEDs:	Yellow LED (Aligned) Red LED (Triggered)		
Output:	SPDT Relay output		
Switching Capacity:	250VAC/1A, 30VDC/2A		
Enclosure:	IP 66 Weatherproof		
Ambient Temp:	-4 ° ~ 131 ° F (-20 ° ~ 55 ° C)		